

# AD60-63

## Miniature Circuit Breaker

### Application




The product is mainly used in AC 50Hz/60Hz single pole 240V or two, three, four-pole 415v circuit for overload and short-circuit protection as well as for infrequent on-and-off switching electric equipment and lighting circuit under normal condition. It is characterized with novel structure, light weight, reliable performance, high breaking capacity. It is in conformity with IEC60947-2 standard.

### Main Technical Data

NO. of pole	1P,2P,3P,4P
Rated of Voltage	240V/415V AC
Rated Current	50A
Mechanical and Electrical life	(O-C) not less than 6000 operations
Protective Grade	IP20
Breaking Capacity	6kA
Instantaneous Testing	<b>14-18In</b> This is especially developed as per Eskom specification and request for Eskom application only

### Dimension

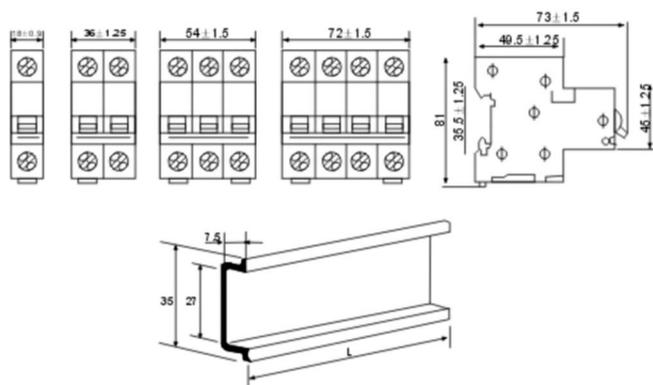

### Tripping Curve - K curve

