

Cable Tie


Application

Used to bundle cables, wires, conducts, plants or other things in the industry of electrical & electronic, lighting, pharmaceutical, hardware, chemical, computer, machinery, agriculture, etc.

Main Technical Data

Material	Nylon 66
Structure	Self locking head
Color	White/black/nature standard color, other colors are available(such as RED / YELLOW / BLUE /GREEN and so on)
Working Temperature	Applied from -40℃ to 85℃
Feature	Flame-retardant(94V-2), heat-resistant

Outline & Specification

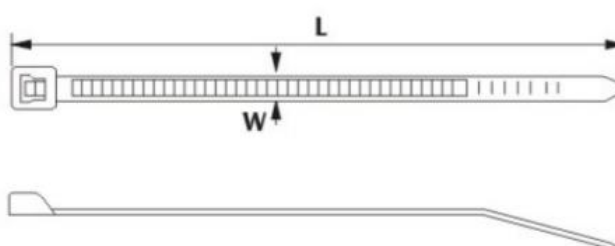

W x L(mm)	Bundle diameter(mm)	Min loop tensile strength	W x L(mm)	Bundle diameter(mm)	Min loop tensile strength
2.5x60	2-11	18LBS/8KGS	4.8x450	3-130	50LBS/20KGS
2.5x80	2-16		4.8x500	3-150	
2.5x100	2-22		4.8x650	3-160	
2.5x120	2-30		7.6x200	3-50	120LBS/55KGS
2.5x150	2-35		7.6x250	4-65	
2.5x160			7.6x300	4-80	
2.5x200	2-50		7.6x350	4-90	
3.6x100	3-30	40LBS/18KGS	7.6x370	4-100	
3.6x120	3-32		7.6x400	4-105	
3.6x150	3-35		7.6x450	4-110	
3.6x180	3-40		7.6x500	4-150	
3.6x200	3-50		7.6x550	4-165	
3.6x250	3-65		9.0x350	8-100	175LBS/79.4KGS
3.6x300	3-80	50LBS/22KGS	9.0x400	8-105	
3.6x370	3-105		9.0x450	8-118	
4.8x100	3-30		9.0x500	8-150	
4.8x120	3-35		9.0x550	8-160	
4.8x150	3-40		9.0x600	8-170	
4.8x160	3-43		9.0x650	8-185	
4.8x180	3-46		9.0x710	10-195	
4.8x200	3-50		9.0x760	10-210	
4.8x250	3-65		9.0x800	10-230	
4.8x300	3-80		9.0x850	10-245	
4.8x350	3-90		9.0x900	10-265	
4.8x370	3-98		9.0x1000	10-300	
4.8x400	3-105		9.0x1200	10-370	