

Application

AD47-100

Miniature Circuit Breaker


The product is used for AC 50 Hz/60 Hz, single pole 240V, 2,3,4 poles 415V, for protection the circuit from overload and short circuit. It can be used in lighting and electric motor distribution system. Meanwhile it is applicable to an infrequent switch over the electric apparatus and lighting circuit under normal condition. It is in conformity with IEC 60947 standard.



Main Technical Data

NO. of pole	1P,2P,3P,4P
Rated of Voltage	240V/415V AC 230V/400V AC
Rated Current	63A, 80A, 100A
Mechanical and Electrical life	(O-C) not less than 6000 operations
Protective Grade	IP20
Breaking Capacity	6kA,10kA
Production Standard	IEC 60947-2/VC 8036
Applicable ambient temperature	-35~+70°C

Dimensions(mm)

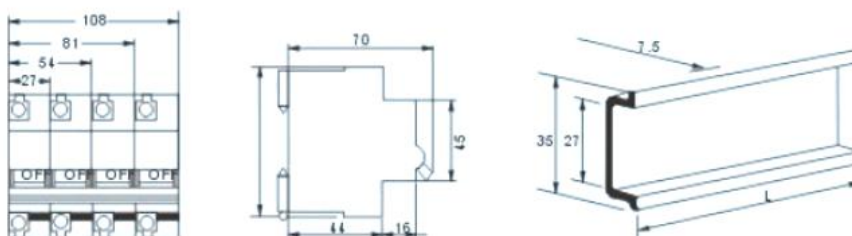

Tripping Curve - C curve

