

# Indicator Voltmeter

AD101-22VM/AD101-22VMS(ND22)

## Model and Explanation



AD101-22VM(ND22)



AD101-22VMS(ND22)

AD101 - □ □ □

No letter is round, and square is marked as "S"  
Am: current;Vm:voltage;Hz:frequency; VAm: current and voltage

Necks dimension

Pilot light type


## Working Condition

1. Ambient temperature:  $-25^{\circ}\text{C}\sim+55^{\circ}\text{C}$ ;
2. Relative humidity:  $\leq 98\%$  ;
3. Pollution degree is 3, installation group is III.


## Main Technical Data

Power frequency withstand voltage	2.5kv/1 min(effective AC value)
Insulation resistance	$\geq 2\text{M}\Omega$
Allowable voltage fluctuation	$\pm 20\%$
Continuous operating life	$\geq 30000\text{H}$
Luminance	$\geq 100\text{cd}/\text{m}^2$
Comparative Tracking Index	$\geq 600$
Protection degree of the head	IP65 (IP67 is available on request)
Color	White/Yellow/Red/Green/Blue
Indication Range	AC 20-500V

## Dimensions(mm)



AD101-22VM(ND22)

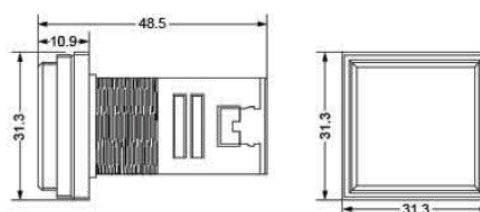

AD101-22VMS(ND22)