

# UKK SERIES Unipolar Junction Box


## Specification

Material: made of PA Nylon

Grade of flame retardant : UL94V0

Metal material: brass platedtim

The transparent cover is good to see if the cable is a reliable connection.

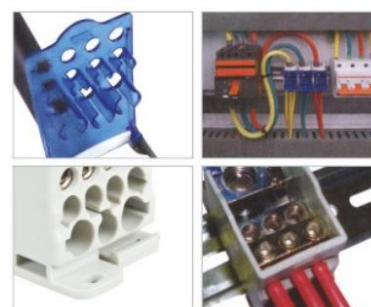

UKK-80



UKK-125



UKK-160



UKK-250
























UKK-400



UKK-500



Item NO.	Current (AMP)	Voltage (V)	Conductors with starfix temules X-section(mm <sup>2</sup> )	Quantity of Hole (PCS)	Dimensions(L X W X H) (mm)
UKK80	80A	690V IEC	 6 to 16	X 1	28 X 65 X 47
			 2.5 to 6	X 4	
			 2.5 to 16	X 2	
UKK125	125A	690V IEC	 10 to 35	X 1	28 X 74 X 48
			 6 to 16	X 4	
			 2.5 to 16	X 6	
UKK160	160A	690V IEC	 10 to 70	X 1	28 X 74 X 48
			 6 to 16	X 4	
			 2.5 to 16	X 6	
UKK250	250A	690V IEC	 35 to 120	X 1	47 X 95 X 50
			 6 to 35	X 2	
			 2.5 to 16	X 5	
UKK400	400A	690V IEC	 2.5 to 10	X 4	47 X 95 X 50
			 95 to 185	X 1	
			 6 to 35	X 2	
UKK500	500A	690V IEC	 2.5 to 16	X 5	47 X 95 X 50
			 2.5 to 10	X 4	
			 4x15.5x0.8 to 8x24	X 1	
			 6 to 35	X 2	
			 2.5 to 16	X 5	
			 2.5 to 10	X 4	