

Din Mounted Change Over Switch

CO-MOD



Application & Specification

The product is of four functions as switch on and off, conversion and isolation, can be used in a group of line with two loads, as well as two power supplies.

The 3P can also be used to control the positive and negative rotation of the motor, with standard DIN rail (35x7.5mm) mounted, the housing is molded by PA66 material, with high flame retardant performance.

Technical Data

Rated Current	40A, 63A, 100A, 125A
Voltage	415V AC 50/60Hz
Standard	IEC60947-3
Poles	1P, 2P, 3P, 4P
Installation location	Mount on the place where has no obvious vibration or impact
Connection terminal	Screw terminal
Installation	Installed on 35mm DIN rail
Ambient temperature	-5~+40°C the average value cannot exceed to +35°C within 24h

Instruction for Use

2P:


When the handle is in the M position: 1,2 and 5,6 are connected

When the handle is in the S position: 1,4 and 5,8 are connected

4P:

When the handle is in the M position: 1,2 / 5,6 / 9,10 and 13,14 are connected

When the handle is in the S position: 1,4 / 5,8 / 9,12 and 13,16 are connected

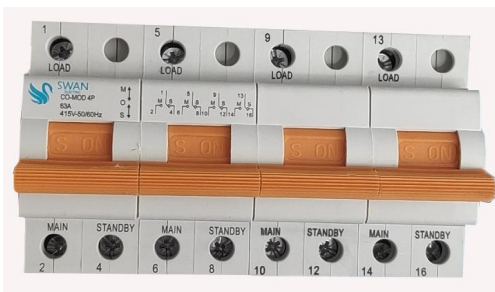

Dimension(mm)

